


# ARMADI MURALI REFRIGERATI

## MULTIDECK COOLERS



### MR 188 TN3 BLK MR 188 TN3 GRY

Armadio murale ventilato tre porte.  
Temperatura normale.  
Three door ventilated multideck cooler.  
Positive temperature.

Colori disponibili / Available colors



#### SPECIFICHE COLORI / COLOR DETAILS

MR 188 TN3 / MR 250 TN4

**Versioni BLK / BLK Versions**

Esterno / Exterior ● Nero / Black

**Versioni GRY / GRY Versions**

Esterno / Exterior ● RAL7015



### MR 250 TN4 MR 250 TN4 GRY

Armadio murale ventilato quattro porte.  
Temperatura normale.  
Four door ventilated multideck cooler.  
Positive temperature.

Colori disponibili / Available colors





Motoventola assiale  
Axial fan motor



Termostato elettronico  
Electronic thermostat



Mensole con portaprezzo  
Shelves with price holder

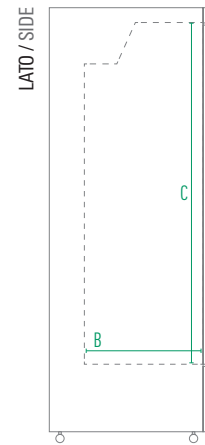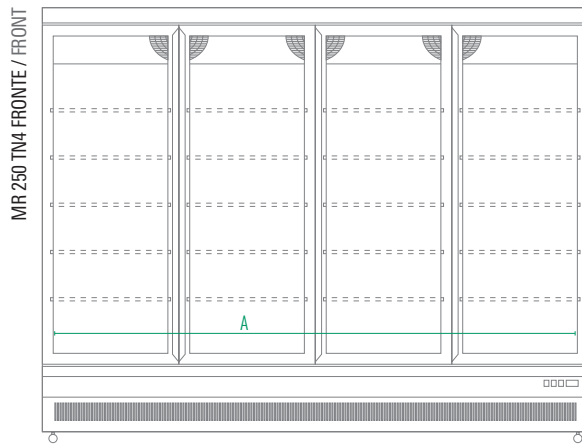

Dimensioni mm / Dimensions mm	MR 188 TN3	MR 250 TN4
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1880 x 710 x 2003	2508 x 710 x 2003
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	191 x 780 x 2200	2540 x 780 x 2200
A - Larghezza / Width	1790	2418
B - Profondità / Depth	595	595
C - Altezza / Height	1568	1568
Adesivo Laterale / Side Right	632 x 1952	632 x 1952
Adesivo vetro / Sticker glass	523 x 1493	523 x 1493

Caratteristiche Tecniche / Technical Features	MR 188 TN3	MR 250 TN4
Temperatura / Temperature Range	+1 °C / +10 °C	+1 °C / +10 °C
Classe Climatica / Climate Class	7	7
Volume Netto-Lordo / Net-Gross Volume	Lt. 1246 / 1664	Lt. 1683 / 2248
Superficie Esterna/ Body	Acciaio verniciato / Painted steel	Acciaio verniciato / Painted steel
Superficie Interna / Inner Liner	Alluminio verniciato / Painted aluminium	Alluminio verniciato / Painted aluminium
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 65	dB 65
Smart Link WiFi   Controllo remoto / Remote control	Optional	Optional
Spessore isolamento / Insulation thickness	mm 45	mm 45
Sbrinatorio Defrost	Automatico a fermo compressore + Manuale Automatic compressor cycle + Manual	Automatico a fermo compressore + Manuale Automatic compressor cycle + Manual
Illuminazione / Lighting	3 Led verticali / Vertical + 3 Led orizzontali / Horizontal	4 Led verticali / Vertical + 4 Led orizzontali / Horizontal
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes
Mensole con portaprezzo (LxP) / Shelves with price holder (WxD)	N° 10 - mm 566 x 480 laterale / lateral N° 5 - mm 624 x 480 centro / middle	N° 10 - mm 566 x 480 laterale / lateral N° 10 - mm 624 x 480 centro / middle
Ruote-Piedi / Castors-Feet	8 Ruote / 8 Castors	10 Ruote / 10 Castors
Peso Netto-Lordo / Net Weight	Kg 207,5 / 235	Kg 360 / 400
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 700	W 920
Consumo Energia / Energy Consumption	Kwh/24H 5,41	Kwh/24H 8,23