

AC 57 EcoX

Self Contained Ice Machine 36 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AC L
Large Gourmet 39 g
Ø 38 mm - H 41 mm



AC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



AC S
Small Gourmet 8 g
Ø 21 mm - H 25 mm

CONDENSING SYSTEM

water cooled
air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
AC L	Large	38 mm	41 mm	39 g
AC M	Medium	30 mm	34 mm	20 g
AC S	Small	21 mm	25 mm	8 g

OPERATING REQUIREMENTS

CERTIFICATIONS



	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 36 kg

August 2025


AC 57 EcoX

Self Contained Ice Machine 36 kg

Scotsman
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 36 kg

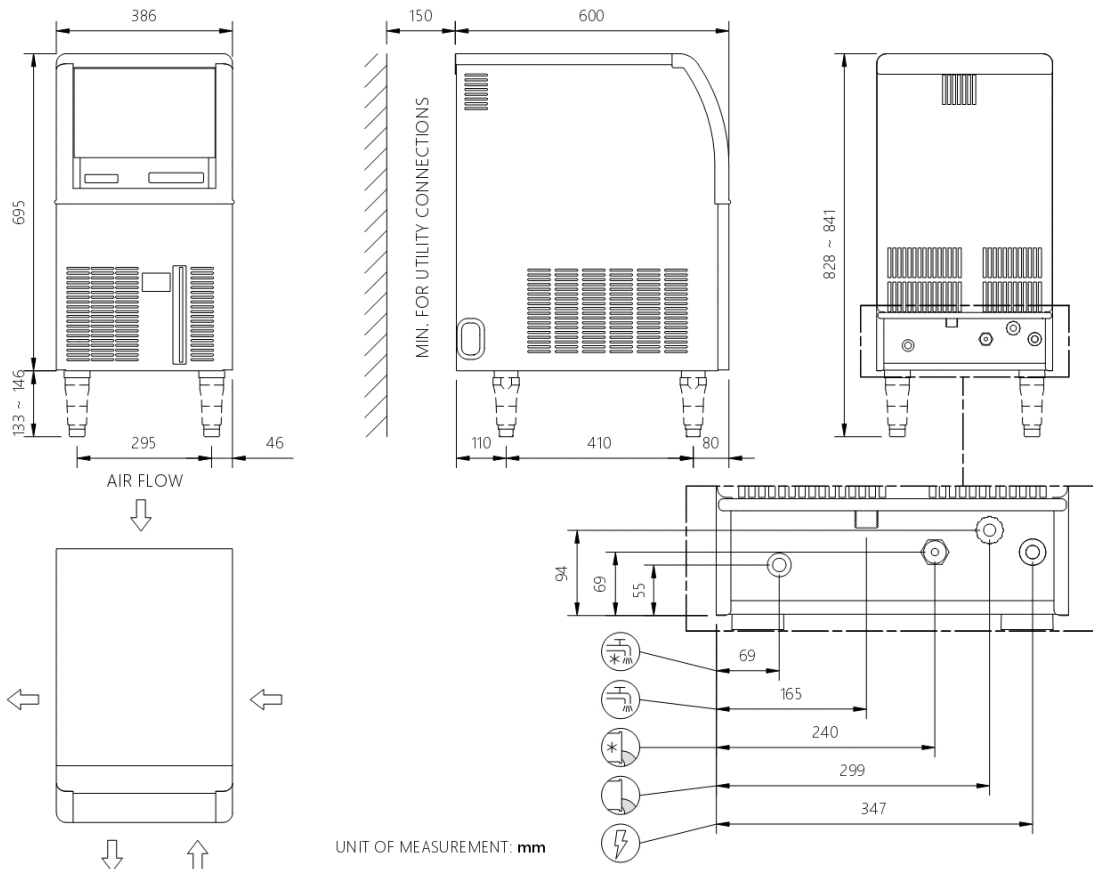

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
386 x 600 x 693 mm			460 x 670 x 810 mm										
36 kg			41kg										
			24 h ice production kg			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
			C Amb. / °C Water										
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm ²	A	
			kg	kg	kg								
ACM 57 WS	230\50\1	W	36	31	27	11	0,6	6	23	290	3 x 1,0	10	
ACM 57 AS	230\50\1	A	33	31	25	11	0,6	7	4	370	3 x 1,0	10	
ACL 57 WS	230\50\1	W	32	31	25	11	0,7	6	24	320	3 x 1,5	10	
ACL 57 AS	230\50\1	A	29	28	16	11	0,6	6	4	340	3 x 1,5	10	
ACS 57 AS	230\50\1	A	28	27	22	11	0,6	7	4	370	3 x 1,5	10	